

## Control valve for CDP/CDP-T 40-50-70

- ⓔ EN Control valve 1/2" ON/OFF, 230V, Frese type with actuator.
- ⓔ DE Regelventil, 1/2", EIN/AUS, 230 V, Frese-Modell mit Antrieb
- ⓔ FR Vanne de commande 1/2» MARCHÉ/ARRÊT, 230 V, type Frese avec actionneur.
- ⓔ IT Valvola di controllo 1/2" ON/OFF, 230 V, modello Frese con attuatore.
- ⓔ PT Válvula de controlo de 1/2" LIGAR/DESLIGAR, 230 V, tipo Frese com atuador.
- ⓔ RU Регулирующий клапан 1/2" ON/OFF, 230 В тип Frese с приводом.
- ⓔ DA Reguleringsventil 1/2" ON/OFF, 230 V, Frese-type med aktuator

# Dantherm<sup>®</sup>

CONTROL YOUR CLIMATE

Part number - 094340

## Control valve and actuator for CDP-CDP/T

Manual, part no.

Part number of this service manual is 094794.

Actuator

Control signal	Running time (50Hz)	Supply voltage	Power consumption	Valve stroke
On/Off	180s	AC 230V	1.2W	5.0-5.5 mm


Valve

Flow l/h	Stroke
65-370	5.0 mm

Components




- Presetting of Max. water flow
- Voreinstellung Max. Wasserfluss
- Préréglage Max. l'écoulement de l'eau
- Preselezione Max. flusso d'acqua
- Predefinição Máx. fluxo de água
- Предварительная настройка Максимум. водный поток
- Forudindstilling Max. vandgennemstrømning

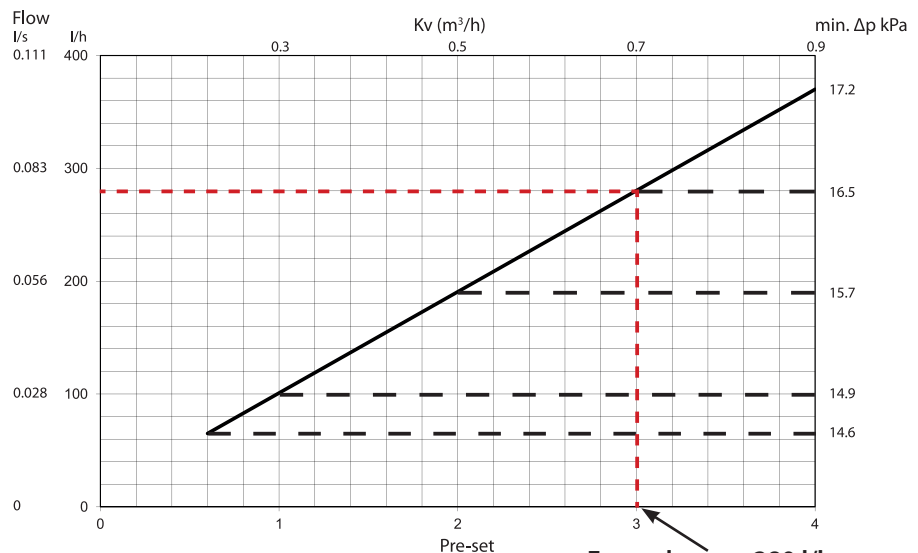

Example: max 280 l/h = presetting 3



Overview, Übersicht, l'aperçu,  
vista d'insieme, descrição  
geral, рис., oversigt.

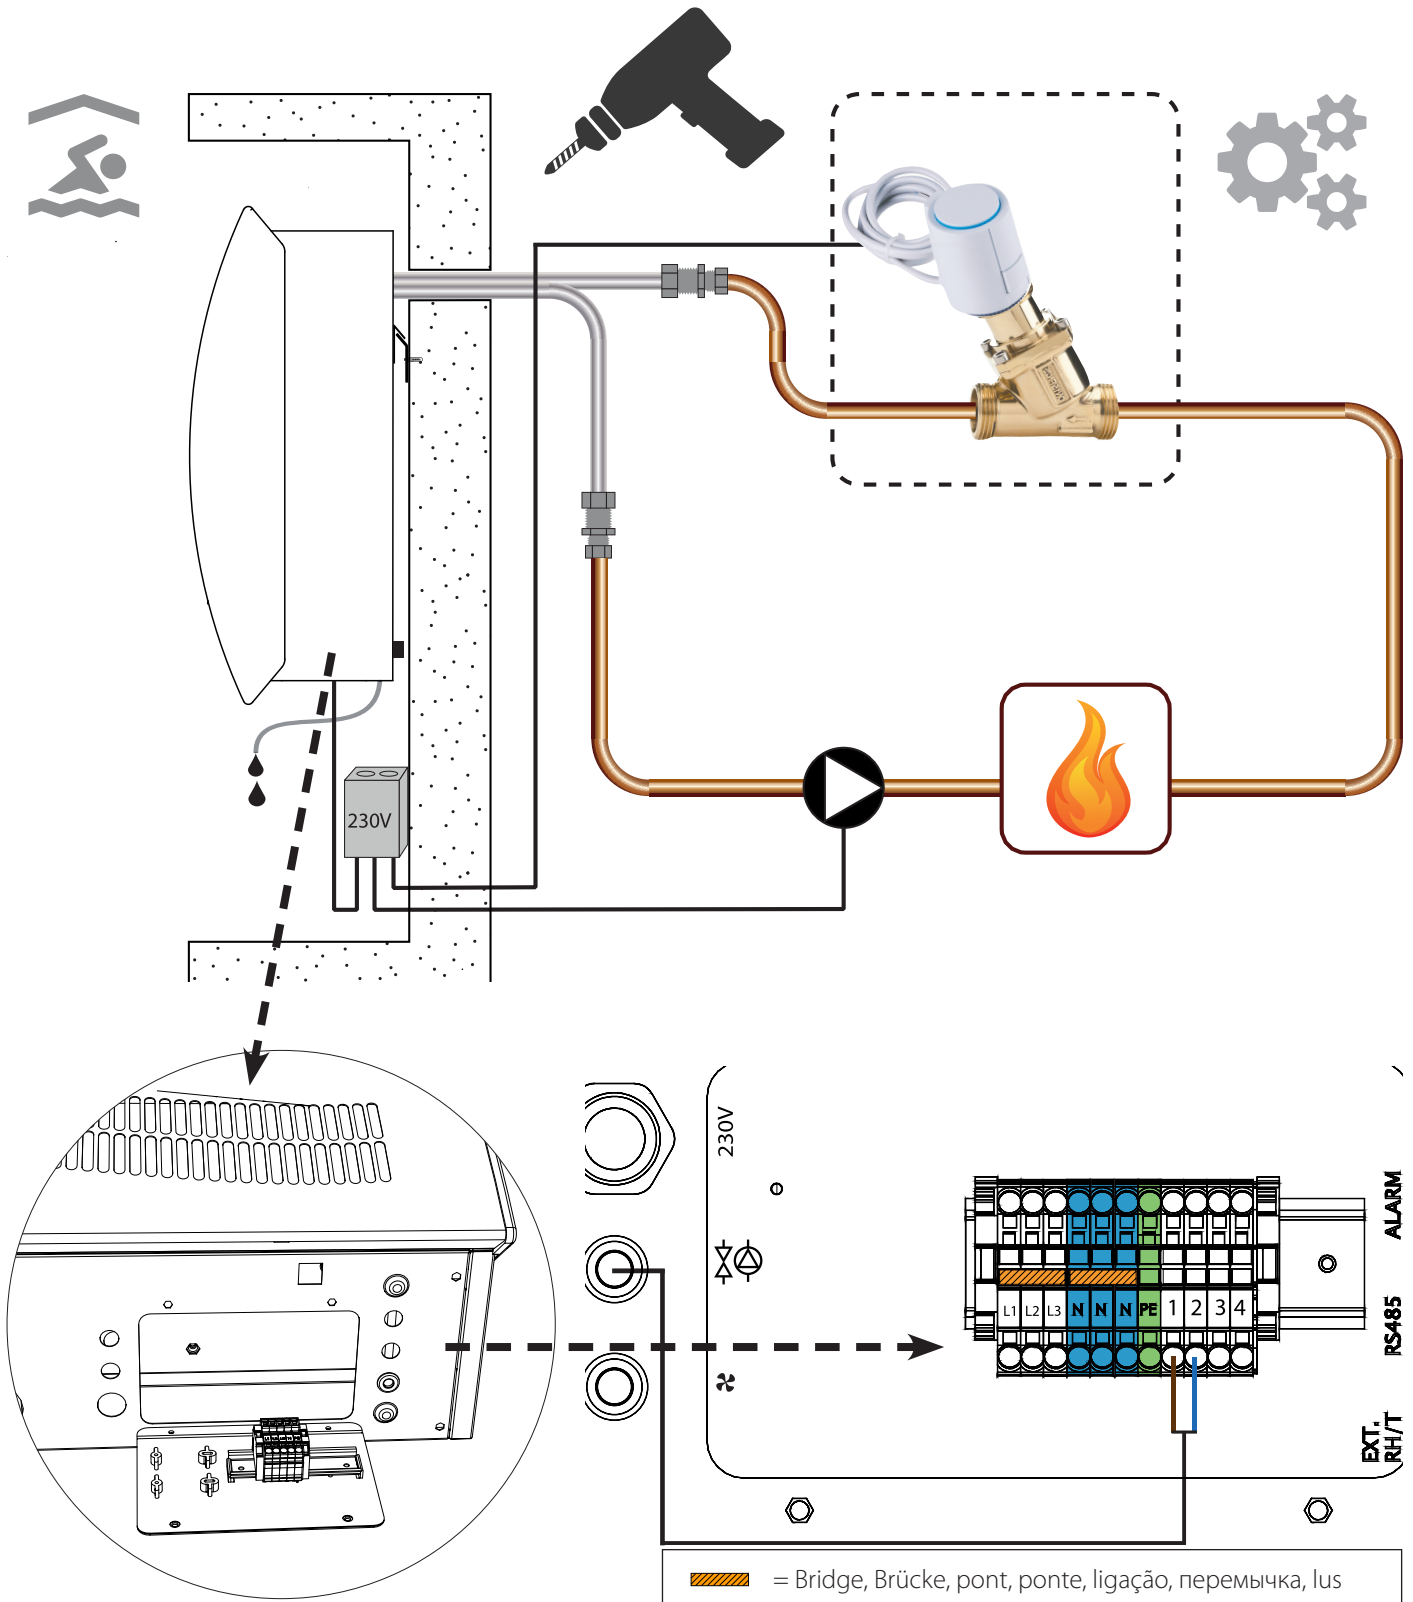


**Technical data, Technische Daten, Caractéristiques techniques, Specifiche tecniche, Dados técnicos, Технические характеристики, tekniske data.**

Valve housing, Ventilmaterial, matériau de la valvule, materiale della valvola, Material da válvula, Материал клапана, materiale	DZR Brass, messing, Laiton, ottone, latão, латунь, messing
DP controller DP Regler, DP régulateur, DP controllore, DP controlador, DP Контролер, DP regulator.	PPS 40% glass, Glas, Verre, vetro, vidro, стакан, glas
Spring, feder, Ressort, molla, mola, Пружина, fjeder:	Stainless steel, Rostfreier Stahl, Acier inoxydable, Acciaio inossidabile, Aço inoxidável, Нержавеющая сталь, rustfrit stål
Diaphragm, Membran, Diaphragme, Diafragma, Diafragma, Диафрагма, membran:	HNBR
O-rings, O-Ringe, Joints toriques, anelli di tenuta, anel de vedação, уплотнительное кольцо, O-ringe:	EPDM
Pressure class, Druckklasse, Classe de pression, classe di pressione, Classe de pressão, Класс давления, trykklasse.: PN25	PN25
Max. differential pressure, Max. Differenzdruck, Max. pression différentielle, Max. pressione differenziale, Máx. pressão diferencial, Максимум. перепад давления, Max. differenstryk:	800 kPa
Medium temperature range, Mittlerer Temperaturbereich, Plage de température moyenne, gamma media di temperatura, Faixa de temperatura média, Средний температурный диапазон, middel temperaturområde :	0°C - 120°C
Thread, Gewinde, Filetage, Filettatura, Rosqueamento, резьба, gevind	ISO 228
Stroke, Hublänge, Longueur de course du cylindre, lunghezza corsa, comprimento de curso, длина хода, vandring	5mm
Flow, Fluss, écoulement, il fluire, fluxo, поток, flow	65 - 370 l/h

---

CDP/CDP-T Dehumidifier -  
Service Manual  
CDP/CDP-T Entfeuchter -  
Servicehandbuch  
CDP/CDP-T Déshumidificateur  
- Manuel d'entretien  
CDP/CDP-T Deumidificatore -  
Manuale di servizio  
CDP/CDP-T Desumidificador-  
Manual de manutenção  
CDP/CDP-Tосушитель  
- Руководство по  
техническому  
обслуживанию  
CDP/CDP-T Affugter  
Servicemanual



<http://bit.ly/CDP-servicemanual>





**Dantherm Air Handling A/S**

Marienlystvej 65  
7800 Skive  
Denmark

Phone +45 96 14 37 00  
Fax +45 96 14 38 00

infodk@dantherm.com  
www.dantherm.com

**Dantherm AS**

Postboks 4, 3101 Tønsberg  
Norway  
Besøksadresse: Løkkeåsvn. 263138  
Skallestad

Phone +47 33 35 16 00  
Fax +47 33 38 51 91

dantherm.no@dantherm.com  
www.dantherm.com

**Dantherm Air Handling AB**

Fridhemsvägen 3  
602 13 Norrköping  
Sweden

Phone +46 (0) 111 930 40  
Fax +46 (0) 121 133 70

infose@dantherm.com  
www.dantherm.se

**Dantherm Air Handling**

Suite # 1009 Prism Tower  
Business Bay  
Dubai, UAE

Mobile +971 56 831 7466  
Direct +45 60 23 55 29

frb@dantherm.com  
www.dantherm.com

**Dantherm Limited**

12 Windmill Business Park  
Windmill Road, Clevedon  
North Somerset, BS21 6SR  
England

Phone +44 (0)1275 87 68 51  
Fax +44 (0)1275 34 30 86

infouk@dantherm.com  
www.dantherm.co.uk

**Dantherm Cooling A/S**

4<sup>th</sup> Dobryninskiy Lane 8  
Office C 11-01  
119049 Moscow  
Russia

Mobile +7 903 700 69 01  
Phone +7 495 642 95 60  
Fax +44 (0)1275 34 30 86


thj@dantherm.com  
www.dantherm.com

**Dantherm Cooling GmbH**

Ziegler Str. 19  
D-86199 Augsburg  
Deutschland

Mobile +49 172 627 02 87  
Direkt: +49 821 297 00 297  
Fax +49 821 297 00 298

KW@dantherm.com  
www.dantherm.com



Dantherm can accept no responsibility for possible errors and changes.  
Irrtümer und Änderungen vorbehalten.

Dantherm n'assume aucune responsabilité pour erreurs et modifications éventuelles.

Dantherm se exime de cualquier responsabilidad por errores y cambios realizados.

A Dantherm recusa qualquer responsabilidade relacionada com eventuais erros e alterações.

Компания Dantherm не принимает на себя ответственность за возможные ошибки и изменения в настоящем документе.